


Product Spec Sheet
Podcast Recording Console
Mixcast 4

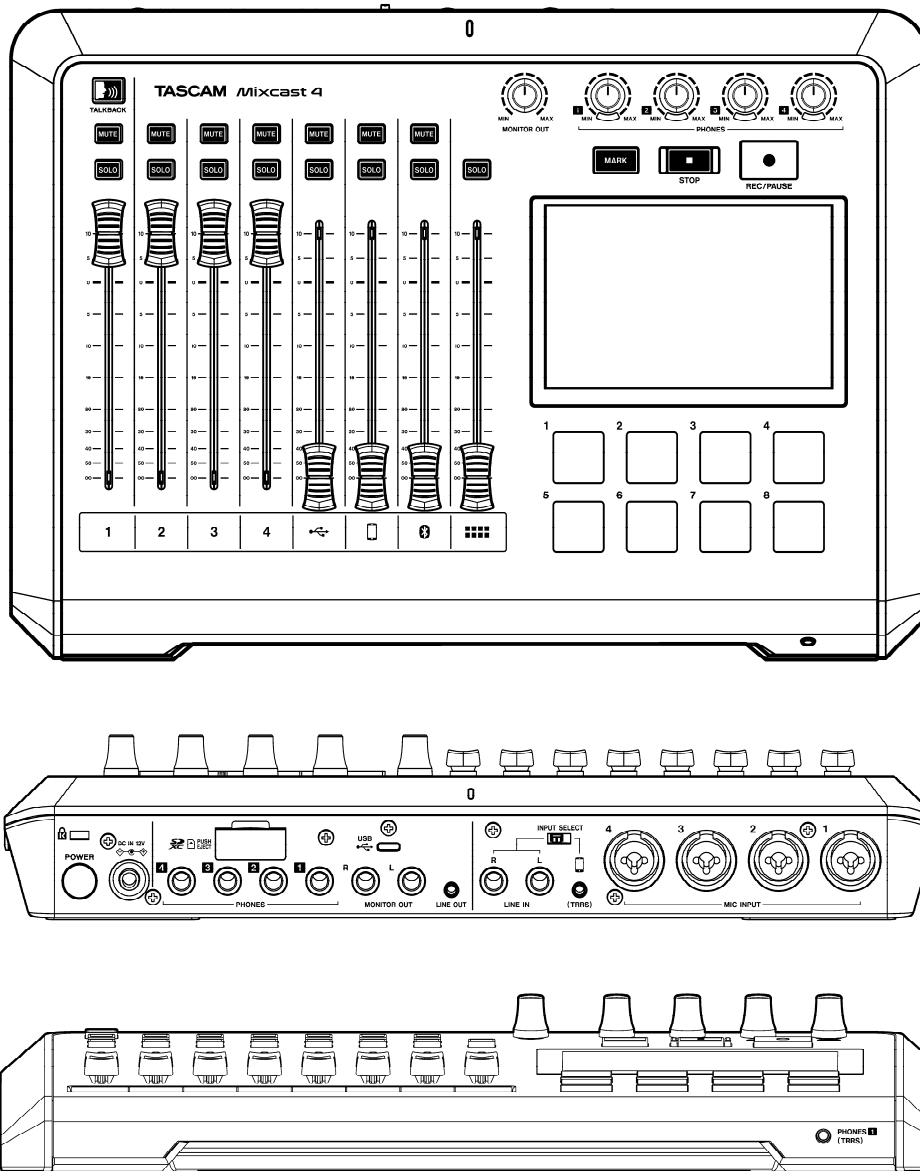

Specifications/rated values

Recorder specifications

Recording media

- SD cards (64 MB–2 GB)
- SDHC cards (4 GB–32 GB)
- SDXC cards (48 GB–512 GB)

Recording/playback formats

WAV: 48 kHz, 24-bit, 2-channel stereo/14-channel poly (BWF format)

Analog audio input ratings

Mic input jacks (1–4)

Connectors: XLR/TRS combo jacks

XLR:	XLR-3-31 (1: GND, 2: HOT, 3: COLD)
TRS:	6.3 mm (1/4") standard TRS jacks (Tip: HOT, Ring: COLD, Sleeve: GND)
Maximum input level:	+10dBu(when LEVEL at min.)
Nominal input level:	-10 dBu (when LEVEL at min.)
Minimum input level:	-76.5 dBu (when LEVEL at max.)
Gain range:	66.5 dB
Input impedance:	2.1 k Ω

PHONES (TRRS) 1 jack (CTIA standard)

Connector:	3.5 mm (1/8") 4-pole mini jack
Maximum input level:	+4 dBV(when LEVEL at min.)
Nominal input level:	-16 dBV (when LEVEL at min.)
Minimum input level:	-82.5 dBV (when LEVEL at max.)
Gain range:	66.5 dB
Input impedance:	2 k Ω

LINE IN (TRRS) jack (CTIA standard)

Connector:	3.5 mm (1/8") 4-pole mini jack
Nominal input level:	+8 dBV
Maximum input level:	-12 dBV
Input impedance:	12 k Ω

LINE IN L/R (balanced) jacks

Connectors:	6.3 mm (1/4") standard TRS jacks (Tip: HOT, Ring: COLD, Sleeve:GND)
Maximum input level:	+24 dBu
Nominal input level:	+4 dBu
Input impedance:	11 k Ω

Analog audio output ratings**PHONES jacks (1-4)**

Connectors:	6.3 mm (1/4") standard stereo jacks
Maximum output:	45 mW + 45 mW (0.1% THD+N or less, into 32 Ω load)

PHONES (TRRS) 1 jack (CTIA standard)

Connector:	3.5 mm (1/8") 4-pole mini jack
● PHONES (TRRS) 1 output splits from PHONES 1 output	

LINE OUT (TRRS) jack (CTIA standard)

Connector:	3.5 mm (1/8") 4-pole mini jack
Maximum output level:	-25 dBu
Nominal output level:	-45 dBu
Output impedance:	100 Ω

MONITOR OUT L/R (balanced) jacks

Connectors:	6.3 mm (1/4") standard TRS jacks (Tip: HOT, Ring: COLD, Sleeve:GND)
Maximum output level:	+20 dBu
Nominal output level:	+0 dBu
Output impedance:	200 Ω

LINE OUT jack

Connector:	3.5 mm (1/8") stereo mini jack
Maximum output level:	+6 dBV
Nominal output level:	-14 dBV
Output impedance:	200 Ω

Audio performance**Mic amp EIN (equivalent input noise)**

-125 dBu or less (150 Ω termination, LEVEL at max.)

Frequency response

Mic input jacks (1-4)
20 Hz - 20 kHz: +0.3 dB/-0.3 dB (JEITA)

S/N ratio

101 dB (Mic input jacks (1-4), channel faders at 0, 20kHz SPCL LPF + A-Weight)

Distortion

0.003% (Mic input jacks (1-4), 1kHz sine wave, channel faders at 0, 20kHz SPCL LPF)

Crosstalk

95 dB or more

Recording times (in hours: minutes)

Recording format		SIZE	
		4 GB	8 GB
24-bit/ 48 kHz WAV	14 ch	0:35	1:10
	2 ch	4:07	8:15

● The recording times shown above are not continuous recording times.
They are total recordable times for SD/SDHC/SDXC cards.

USB specification

Connector: USB Type-C
Format: USB 2.0 High-Speed, Mass-storage class/USB Audio Class 2.0 (USB class-compliant)

USB Audio

Sampling Rate 48 kHz
Bit Depth 24 bit
Number of inputs 14 channels *Output from this unit
Number of outputs 2 channels *Input to this unit

Bluetooth

Output class: 2 (about 10m* unobstructed transmission distance)
Supported profile: A2DP
Supported A2DP codecs: SBC, AAC
Supported A2DP content protection: SCMS-T

*The transmission distance is an estimate. The transmission distance may vary depending on the surrounding environment and radio wave conditions.

【Computer system requirements】

Check the TEAC Global Site (<http://teac-global.com/>) for the latest information about supported operating systems.

Operation with each OS was confirmed with standard system setups that met the following conditions.

Operation is not guaranteed, however, with all systems that meet the following conditions.

Windows

Supported operating systems

Windows 10 64-Bit

Computer hardware requirements

Windows computer with a USB 2.0 (or higher)

*Operation is not guaranteed using the TASCAM driver with ARM64 CPUs

Mac

Supported operating systems

macOS Big Sur (11)
macOS Catalina (10.15)

Computer hardware requirements

Mac with a USB 2.0 (or higher)

iOS/iPadOS devices

iOS 14/iPadOS 14
iOS 13/iPadOS 13

Android devices

Android 11

Android 10

*Compatibility has been confirmed, but this does not guarantee operation with all devices.

【Other】

Power

Dedicated AC adapter (PS-P1220E NUT), DC 12 V

Power consumption

12.5 W (maximum)

Weight

2.55 kg

Operating temperature range


0–40°C

Dimensions

374.8 × 56.5 × 263.6 mm (W x H x D, excluding protrusions)

374.8 × 71.2 × 266.7 mm (W x H x D, including protrusions)

【Dimensional drawings】

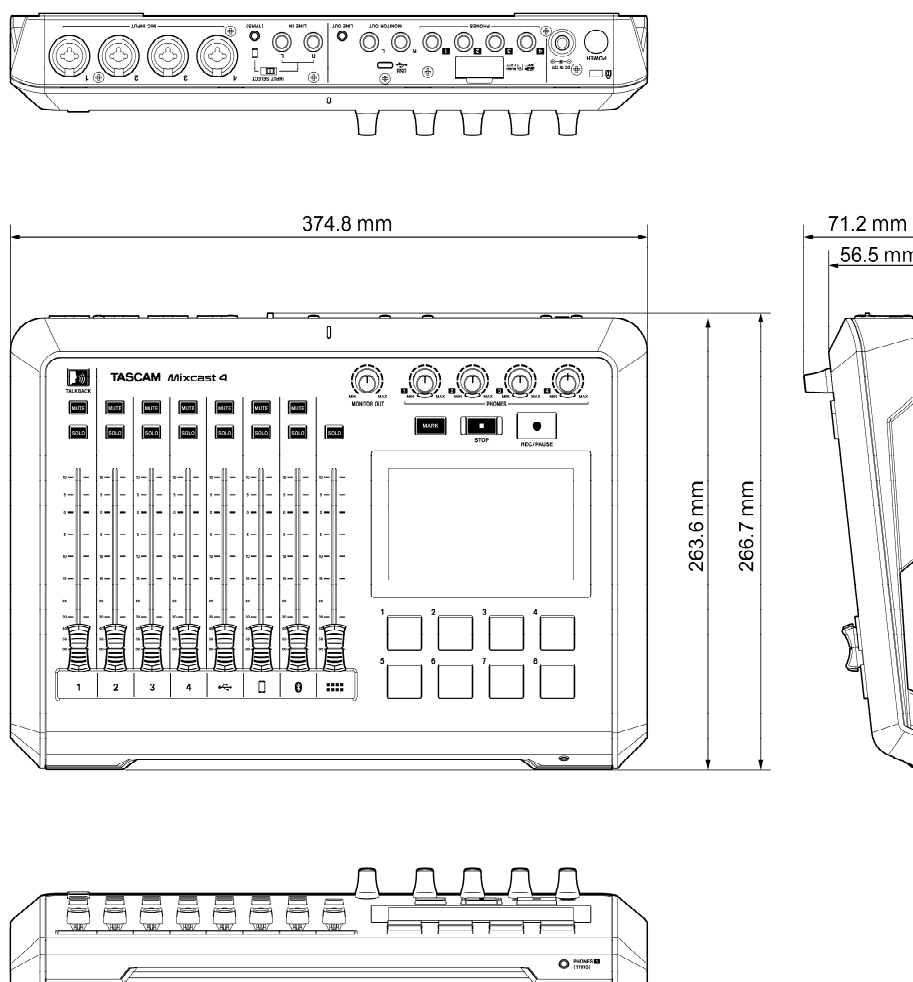

※Illustrations in this manual might differ in part from the actual product.

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.

※Other company names, product names and logos are the trademarks or registered trademarks of their owners.

※Specifications and appearance are subject to change without notice.

※All information included in this document is as of Jul, 2022.